




High speed precision spindles

SCHEDA TECNICA

# TMPE2 EV ER20



| MODELLO   | TENSIONE [Volt] | FREQUENZA [Hz] | GIRI  | POT. RESA [Kw] | ASSORB. [Amp] | Cos j | PESO [Kg] | dB |
|-----------|-----------------|----------------|-------|----------------|---------------|-------|-----------|----|
| TMPE2 9/2 | 220             | 300            | 18000 | 0,55           | 2,4           | 0,72  | 4,5       | 65 |
| TMPE2 9/2 | 380             | 300            | 18000 | 0,55           | 1,4           | 0,72  | 4,5       | 65 |
| TMPE2 9/2 | 220/380         | 300            | 18000 | 0,55           | 2,4/1,4       | 0,72  | 4,5       | 65 |
| TMPE2 9/2 | 220             | 400            | 24000 | 0,55           | 2,4           | 0,72  | 4,5       | 68 |
| TMPE2 9/2 | 380             | 400            | 24000 | 0,55           | 1,4           | 0,72  | 4,5       | 68 |
| TMPE2 9/2 | 220/380         | 400            | 24000 | 0,55           | 2,4/1,4       | 0,72  | 4,5       | 68 |

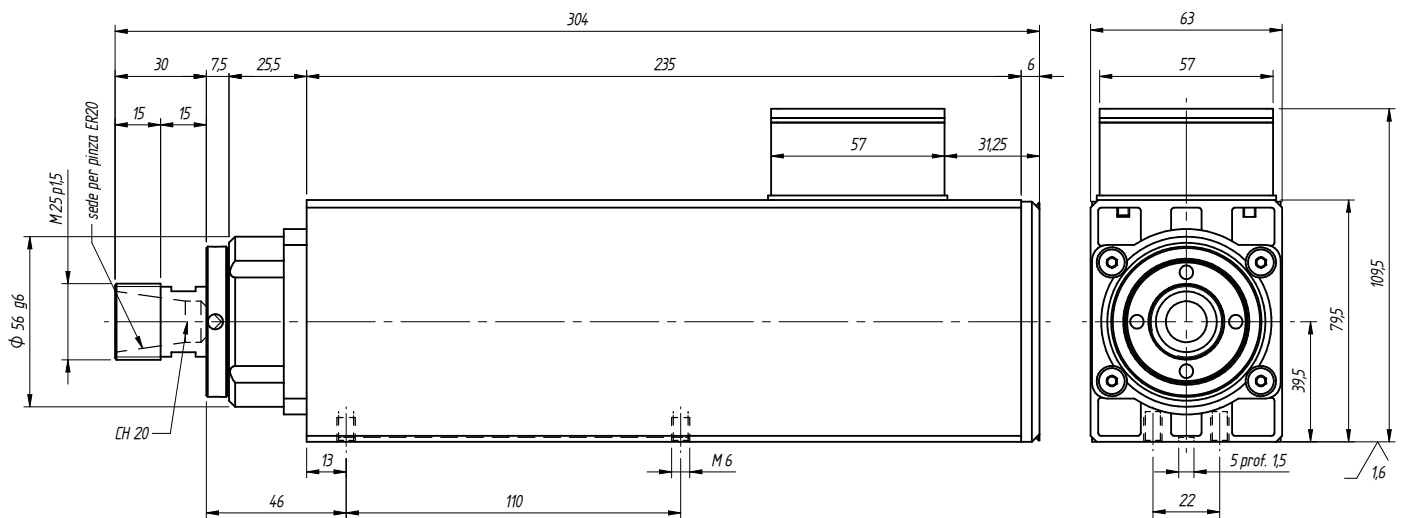

| V elettroventola | A elettroventola | W elettroventola |
|------------------|------------------|------------------|
| 24 Vdc           | 320 mA           | 7,7 W            |

